

POWERScope 5000

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

| | | | |
|-----------------------------|---------------------------------|--------------------------------|---------------------------|
| Алматы (7273)495-231 | Казань (843)206-01-48 | Новокузнецк (3843)20-46-81 | Смоленск (4812)29-41-54 |
| Архангельск (8182)63-90-72 | Калининград (4012)72-03-81 | Новосибирск (383)227-86-73 | Сочи (862)225-72-31 |
| Астрахань (8512)99-46-04 | Калуга (4842)92-23-67 | Омск (3812)21-46-40 | Ставрополь (8652)20-65-13 |
| Барнаул (3852)73-04-60 | Кемерово (3842)65-04-62 | Орел (4862)44-53-42 | Сургут (3462)77-98-35 |
| Белгород (4722)40-23-64 | Киров (8332)68-02-04 | Оренбург (3532)37-68-04 | Тверь (4822)63-31-35 |
| Брянск (4832)59-03-52 | Краснодар (861)203-40-90 | Пенза (8412)22-31-16 | Томск (3822)98-41-53 |
| Владивосток (423)249-28-31 | Красноярск (391)204-63-61 | Пермь (342)205-81-47 | Тула (4872)74-02-29 |
| Волгоград (844)278-03-48 | Курск (4712)77-13-04 | Ростов-на-Дону (863)308-18-15 | Тюмень (3452)66-21-18 |
| Вологда (8172)26-41-59 | Липецк (4742)52-20-81 | Рязань (4912)46-61-64 | Ульяновск (8422)24-23-59 |
| Воронеж (473)204-51-73 | Магнитогорск (3519)55-03-13 | Самара (846)206-03-16 | Уфа (347)229-48-12 |
| Екатеринбург (343)384-55-89 | Москва (495)268-04-70 | Санкт-Петербург (812)309-46-40 | Хабаровск (4212)92-98-04 |
| Иваново (4932)77-34-06 | Мурманск (8152)59-64-93 | Саратов (845)249-38-78 | Челябинск (351)202-03-61 |
| Ижевск (3412)26-03-58 | Набережные Челны (8552)20-53-41 | Севастополь (8692)22-31-93 | Череповец (8202)49-02-64 |
| Иркутск (395)279-98-46 | Нижний Новгород (831)429-08-12 | Симферополь (3652)67-13-56 | Ярославль (4852)69-52-93 |
| Россия (495)268-04-70 | Киргизия (996)312-96-26-47 | Казахстан (7172)727-132 | |

POWERScope 5000

Monitor Print Quality Efficiently. Sustainably increase Performance.

High-performance video technology for flawless print results: Only providers who carry out printing processes quickly, without any major waste and downtimes and with the maximum degree of consistent quality can remain competitive on today's market.

The **POWERScope 5000** digital web video system by BST Group is a tool which particularly meets the requirements of label printing and other narrow web printing applications. In addition, it offers great flexibility when used for monitoring wider webs as well. The system stands out for its outstanding value for money.

POWERScope 5000 combines state-of-the-art technology with user friendliness – while being perfectly adapted to the requirements of modern printing machines. The BST Group system uses a compact digital camera for excellent image quality and includes a number of innovative features that are unique for entry-level web monitoring. **POWERScope 5000** is available with numerous options such as motorized traverses and 21.5" multi-touch monitors.

Just like its very successful predecessors, the new **POWERScope 5000** meets the established criteria: excellent value for money, simple operation, robustness and reliability.



Camera unit of the POWERScope 5000

Technology for impressive quality:

- **Innovative operating concept for flexible adjustment**
 - external commander for optimum positioning on the camera unit, traverse or machine
 - optional 21,5" multitouch monitor offers an additional comfortable operation
- **High image resolution**
 - digital camera for high resolution images with minimum space requirements
 - high resolution image sensors guarantee a dynamic and accurate color reproduction
 - wear-resistant electronic zoom provides an excellent and distortion-free display of the printed web without losses in the image quality
- **Suitable for wide web applications**
 - specially designed traverse enables use for narrow web applications as well as to monitor wider webs
- **Compact design**
 - the space requirements of the size optimized camera unit and the extremely compact controller are unique in this market segment
- **High performance LED strobe**
 - inserted LED strobe guarantees a long lifetime without losses in the illumination intensity
 - ideally designed for the homogeneous illumination of the web
- **Modular system concept**
 - several expansion stages are available for an optimum adaptation to your requirements

POWERScope 5000

Excellent equipment. Outstanding results.

Intuitive, simple, flexible - the POWERScope 5000 user concept

The predecessor systems **POWERScope 3000** and **POWERScope 4000** already featured an impressive flexible user concept. This concept has been further developed and refined for the **POWERScope 5000**. A convenient operation is still possible even when the available space is limited: The operating panel of the **POWERScope 5000** can be easily adjusted to the relevant production demands as it can be rotated for optimal positioning on the camera unit or the controller and can even be removed. The optional 21.5" multi-touch monitor combines viewing and operation on one

monitor in a user-friendly way and tops the user concept off.



The intuitive POWERScope 5000 touch screen user interface "Production Position List"

Powerful Functionality, Super Easy to use Means Excellent Value

• Touch panel

The external keyboard can be set up flexibly and offers a convenient and simple operation of the system thanks to the shortcut buttons. For operating the camera functions, the gestures used on a multi-touch monitor can be performed on the touch pad of the operating panel.

• User interface

The up-to-date user interface impresses with its clear arrangement and reduction to the functions essential for the printer.

• Auto Scan

Automatic scanning of the repeat in machine direction (manual equipment) and/or across the web (motorized) simplifies inspection of the whole print repeat area.

• Position memory

The position memory function saves up to five different positions on the web (including the settings for field of view, zoom, iris and position in web running direction) allowing it to be easily retrieved at the touch of a button.

• Image rotation

The system offers an electronic image rotation by 90° and 180°. This allows flexible adaptations to individual production requirements or user needs.

• Split Screen

On the split screen, the reference image and actual image can be displayed at the same time - according to the saved settings for field of view, zoom, iris and position in web running direction - and compared directly with one another. The split screen function makes it possible to

continually compare the appearance of the current print and a golden sample.

• Compatibility

POWERScope 5000 is fully mechanically compatible with the POWERScope 3000 and POWERScope 4000 predecessor systems without the need for any press frame modifications.



The intuitive POWERScope 5000 touch screen user interface "Production Display Settings Menu".

POWERScope 5000

Options at a glance

• Motorized Traverse

The optional traverse motor moves the camera across the web. This enables an automatic scanning of the entire repeat.

• Touch Screen Display

If maximum user friendliness is what you want, this option replaces the operator touch pad with an HD Touch Screen and an intuitive touch screen operator interface: The POWERScope 5000 21.5" multi-touch monitor provides easy to use touch screen operation.

• Cable track


The cable track for motorized traverses guides cables safely and securely.

• Second keyboard

For maximum flexibility: With an additional keyboard and optional touch screen, POWERScope 5000 offers two further operating options in addition to the standard.



System structure

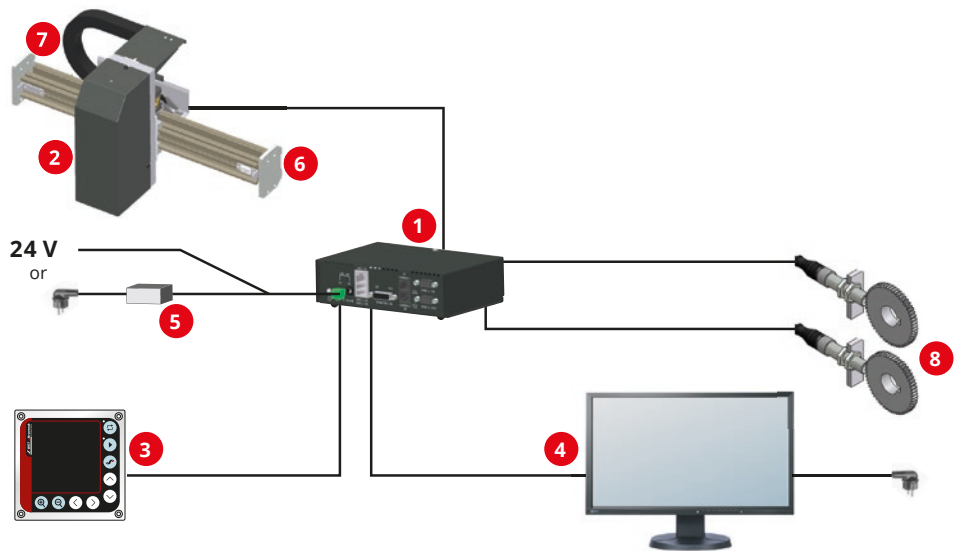

1 Controller 2 Camera 3 external operating panel (opt. touch monitor) 4 Monitor (opt. touch monitor) 5 Controller power supply 6 Traverse (opt. motorized) 7 Cable track 8 Synchronization

Technical data

| | |
|-------------------|--|
| Camera | High resolution CMOS sensor Field of view: min. 13 mm x 9.7 mm (1/2" x 1/3") max. 100 mm x 75 mm (4" x 3") |
| max. web speed | 1,000 m/min |
| Case size | W x H x D 103 x 143 x 282 mm |
| Controller size | W x H x D 180 x 53 x 120 mm |
| Voltage supply | 24V DC (19.2V..27.6V) / 2.0A |
| Traverses | 300 mm – 2500 mm in steps of 50 mm |
| max. cable length | Camera 30 m, Commander 5 m, Monitor 5 m, Trigger Input 30 m |

По вопросам продаж и поддержки обращайтесь:

| | | | |
|-----------------------------|---------------------------------|--------------------------------|---------------------------|
| Алматы (7273)495-231 | Казань (843)206-01-48 | Новокузнецк (3843)20-46-81 | Смоленск (4812)29-41-54 |
| Архангельск (8182)63-90-72 | Калининград (4012)72-03-81 | Новосибирск (383)227-86-73 | Сочи (862)225-72-31 |
| Астрахань (8512)99-46-04 | Калуга (4842)92-23-67 | Омск (3812)21-46-40 | Ставрополь (8652)20-65-13 |
| Барнаул (3852)73-04-60 | Кемерово (3842)65-04-62 | Орел (4862)44-53-42 | Сургут (3462)77-98-35 |
| Белгород (4722)40-23-64 | Киров (8332)68-02-04 | Оренбург (3532)37-68-04 | Тверь (4822)63-31-35 |
| Брянск (4832)59-03-52 | Краснодар (861)203-40-90 | Пенза (8412)22-31-16 | Томск (3822)98-41-53 |
| Владивосток (423)249-28-31 | Красноярск (391)204-63-61 | Пермь (342)205-81-47 | Тула (4872)74-02-29 |
| Волгоград (844)278-03-48 | Курск (4712)77-13-04 | Ростов-на-Дону (863)308-18-15 | Тюмень (3452)66-21-18 |
| Вологда (8172)26-41-59 | Липецк (4742)52-20-81 | Рязань (4912)46-61-64 | Ульяновск (8422)24-23-59 |
| Воронеж (473)204-51-73 | Магнитогорск (3519)55-03-13 | Самара (846)206-03-16 | Уфа (347)229-48-12 |
| Екатеринбург (343)384-55-89 | Москва (495)268-04-70 | Санкт-Петербург (812)309-46-40 | Хабаровск (4212)92-98-04 |
| Иваново (4932)77-34-06 | Мурманск (8152)59-64-93 | Саратов (845)249-38-78 | Челябинск (351)202-03-61 |
| Ижевск (3412)26-03-58 | Набережные Челны (8552)20-53-41 | Севастополь (8692)22-31-93 | Череповец (8202)49-02-64 |
| Иркутск (395)279-98-46 | Нижний Новгород (831)429-08-12 | Симферополь (3652)67-13-56 | Ярославль (4852)69-52-93 |
| Россия (495)268-04-70 | Киргизия (996)312-96-26-47 | Казахстан (7172)727-132 | |